




7316 BECBP


SKF Explorer

Dimensions

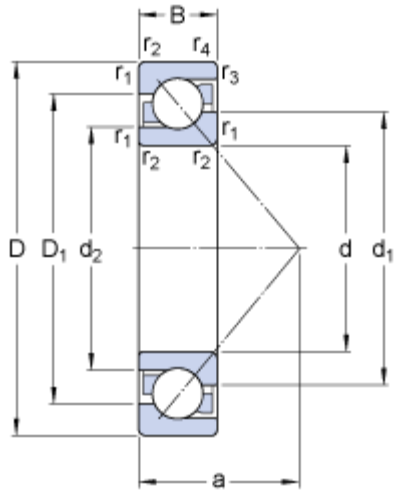

d	80	mm
D	170	mm
B	39	mm
d_1	≈ 115.2	mm
d_2	≈ 97.07	mm
D_1	≈ 136.75	mm
a	72	mm
$r_{1,2}$	min. 2.1	mm
$r_{3,4}$	min. 1.1	mm

Abutment dimensions

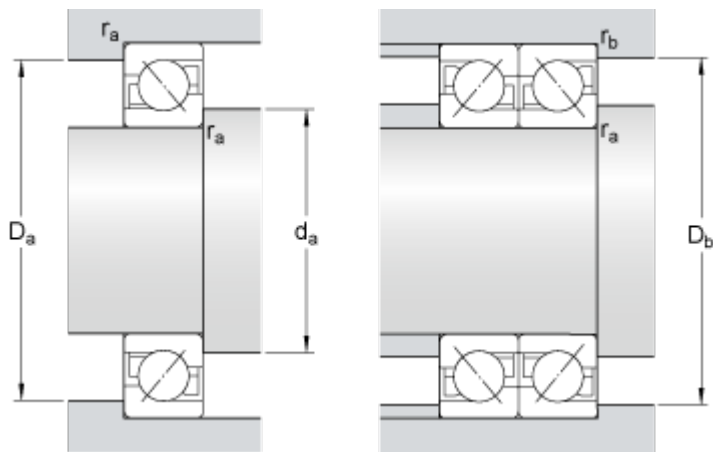

d_a	min. 92	mm
D_a	max. 158	mm
D_b	max. 163	mm
r_a	max. 2	mm
r_b	max. 1	mm

Calculation data

Basic dynamic load rating	C	143	kN
Basic static load rating	C_0	118	kN
Fatigue load limit	P_u	4.5	kN
Reference speed		5000	r/min
Limiting speed		5000	r/min
Calculation factor	A	0.216	
Calculation factor	k_r	0.1	
Calculation factor	e	1.14	

Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35	
--------------------	-----	------	--

Calculation factor	Y_0	0.26
Calculation factor	Y_2	0.57
Bearing pair arranged back-to-back or face-to-face		
Calculation factor	X	0.57
Calculation factor	Y_0	0.52
Calculation factor	Y_1	0.55
Calculation factor	Y_2	0.93

Mass

Mass bearing	3.8	kg
--------------	-----	----
